



鑫密科技企有限公司

40150 台中市東區建智街26號

TEL : 04-22802156 FAX : 04-22802132

HTTP : //www.cf-lights.com

core.focus156@gmail.com

SPECIFICATION


PART NO. : LWSSxH52B011

LED PANEL LIGHT




Part Number Information:

L**W****SS** **X** **H52****B011**



Frame Color

W:White



CCT:

T: 4000K


N: 6500K



產品流水號

Dimensions:

600x600x55mm

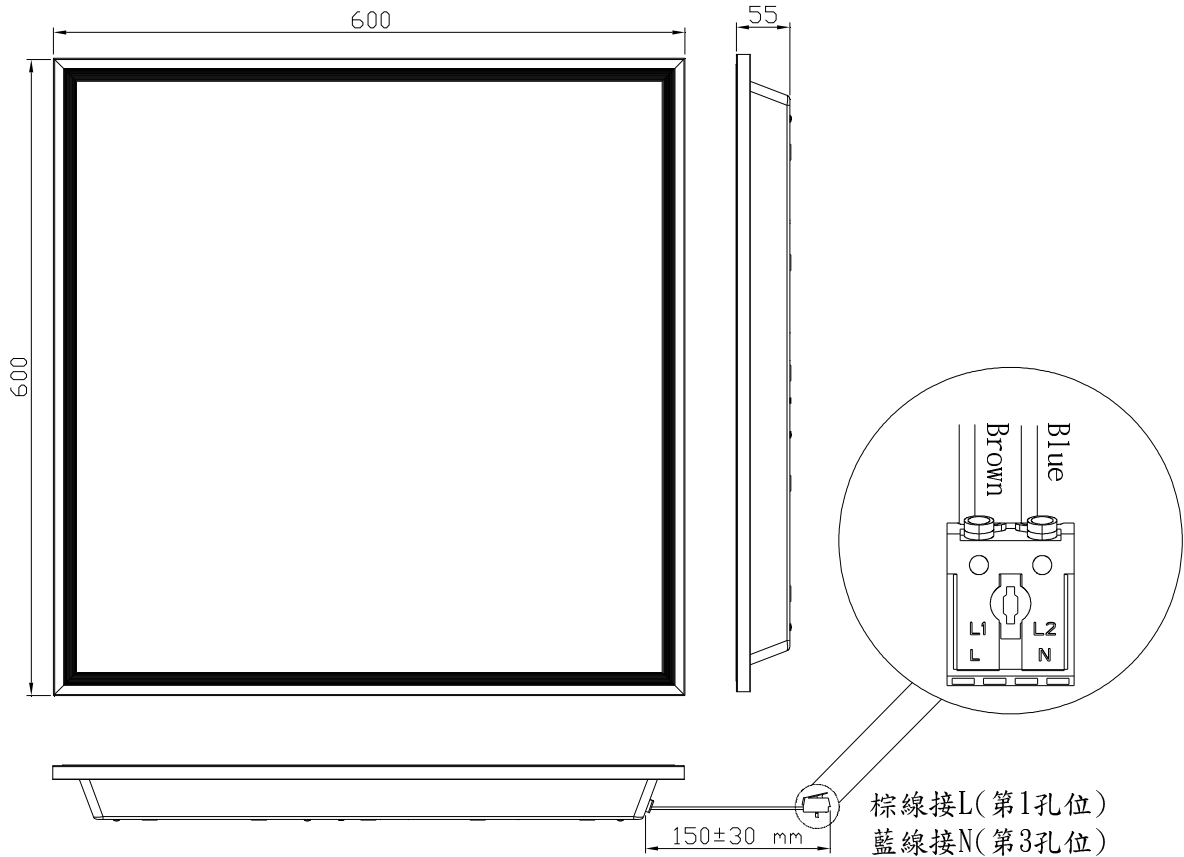

- 1.All dimensions are in millimeters..
2. Tolerance is ± 2 mm unless otherwise noted.

Absolute Maximum Ratings:

Parameter	Symbol	Rating	Unit
Input Voltage Range	Vac	100 - 240	V
Operating Temperature Range	Topr.	-5 to +40	°C
Storage Temperature Range	Tstg.	-20 to +60	°C


Description

Part No.	Emitting Color	CCT
LWSSTH52B011	Natural White	4000K
LWSSNH52B011	Cool White	6500K


Electrical and Optical Characteristics:

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Efficiency	4000K CCT	Ef	220 VAC	100	--	--	lm/w
	6500K CCT			100	--	--	
Correlated Color Temperature	4000K CCT	CCT		3700	4000	4300	K
	6500K CCT			6000	6250	6600	K
Color Index		%		80	--	--	Ra
Viewing Angle		$\Delta\theta$		--	110°	--	Deg
Power Consumption		P _D		31.5	35	38.5	W
Power Factor		%		0.9	--	--	--

Spectroradiometric Parameters (光譜曲線圖) :

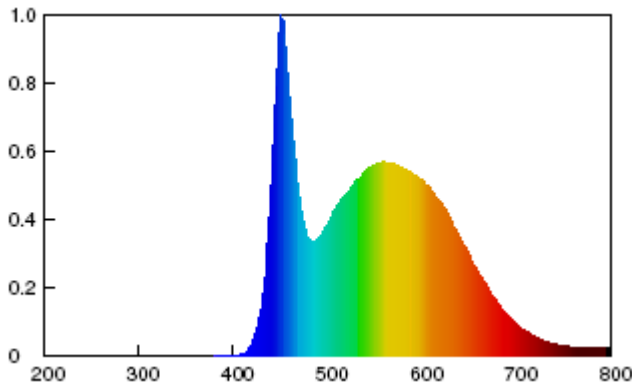


Spectral Distribution (nm) for 6500K

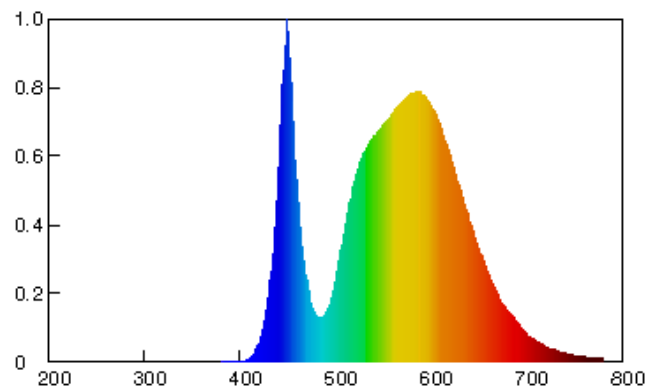


Spectral Distribution (nm) for 4000K

Light Distribution Curve Unit: cd

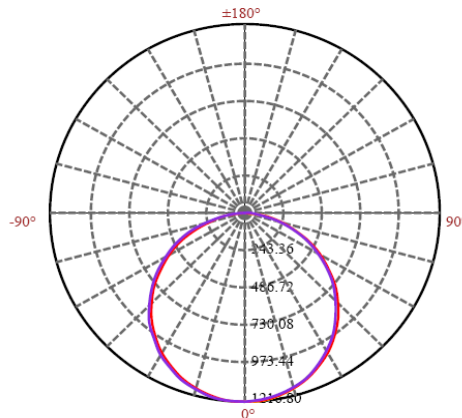

Encased Type:

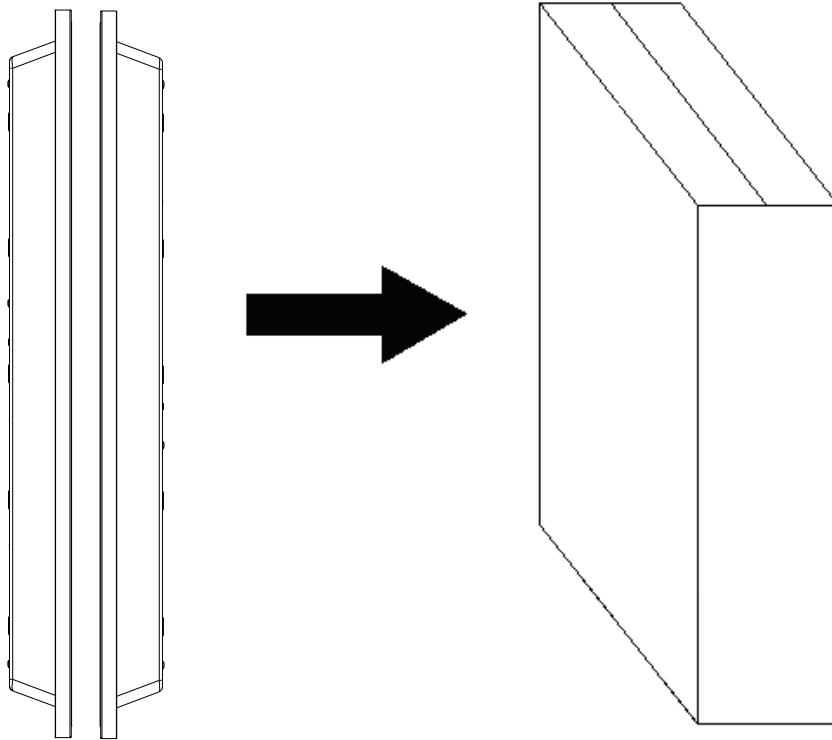

Item P/N.	Quantity	L(mm)	W(mm)	H(mm)	N.W(Kg)	G.W(Kg)
LWSSxH52B011	2 PCS	643	123	656	4.3	5.5